



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892




www.AHSystems.com

PAM-0118

Preamplifier

20 MHz – 18 GHz

This preamplifier has a broad frequency range and high gain, designed to match the double ridge guide horn antenna. An ideal solution for improving system sensitivity.

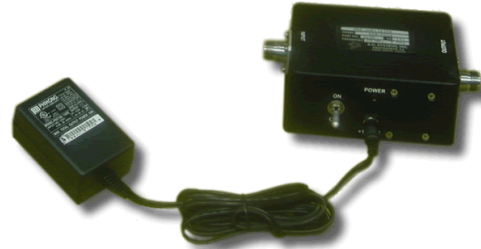

Frequency Range: 20 MHz – 18 GHz

Gain (typical): 38 dB

Gain (minimum): 35 dB

Flatness: +/- 2.75 dB

Noise Figure: 2.5 dB

Output Power @ 1 dB
compression + 10 dBm

VSWR (typical): Less than 1.7:1

Connector: N-Type, female

Physical Dimensions

Height: 2.5 in. (63 mm)

Width: 3.75 in. (95 mm)

Length: 6.25 in. (158 mm)

Weight: 1.1 lb.'s (0.5 kg)

Features

- Broad Frequency Range of 20 MHz to 18 GHz
- Low Noise, High Gain
- Individually Calibrated
- Low VSWR

The PAM-0118 broadband preamplifier is an excellent choice for improving system dynamic range. The performance of this preamplifier will increase your system sensitivity by at least 35 dB and is ideal for low-amplitude test measurements. When measuring in the EMC lab or out in the field for general RFI testing, this preamplifier has a rugged compact design.

Recommended Accessories

- SAS-571 (Double Ridge Guide Horn Antenna)
- SAC-18G-3 (3 Meter Low Loss Cable)
- SAC-18G-0.5 (0.5 Meter Low Loss Cable)



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223
Fax: (818) 998-6892

◆ sales@AHSystems.com
◆ www.AHSystems.com



A.H. Systems Inc.
9710 Cozycroft Ave. Chatsworth, CA 91311
Phone (818) 998-0223 Fax (818) 998-6892
E-mail: sales@A.H.Systems.com
Web site: <http://www.AHSystems.com>

Preamplifier Gain PAM-0118

