



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892



www.AHSystems.com

FCC-3

Tuned Dipole Antenna

170 MHz – 340 MHz

Designed per the FCC specifications, this Tuned Dipole antenna is ideal for site attenuation measurements.



Frequency Range: 170 MHz - 340 MHz

Antenna Factor: 22 to 44

Gain (dBi): 1.5

Balun Loss: <0.5 dB

Maximum Continuous Power: 90 Watts

Impedance: 50 Ω

VSWR: 1.3:1

Connector: N-Type, Female

Features

- F.C.C. Antenna Balun Design
- Omni-directional, Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction with low balun loss, low VSWR
- Three Year Warranty

The A.H. Systems FCC-3 Tuned Dipole Antenna is manufactured per ANSI C63.5 (Willmar Roberts design) and covers the 170 MHz – 340 MHz Frequency Range. This half wave dipole antenna provides an accurate standard for precise EMI testing and site attenuation measurements (per EN55022 and ANSI C63.4), and should be considered as a standard reference antenna for frequencies below 1000 MHz.

Recommended Accessories

- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- PAM-0202 (30 dB Pre-amplifier)



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311




Tel: (818) 998-0223
Fax: (818) 998-6892

◆ sales@AHSystems.com
◆ www.AHSystems.com



A.H. Systems Inc.
9710 Cozycroft Ave. Chatsworth, CA 91311
Phone (818) 998-0223 Fax (818) 998-6892
E-mail: Info@AHSystems.com
Web site: <http://www.AHSystems.com>

Balun Loss
Model: FCC-3
Tuned Dipole Antenna

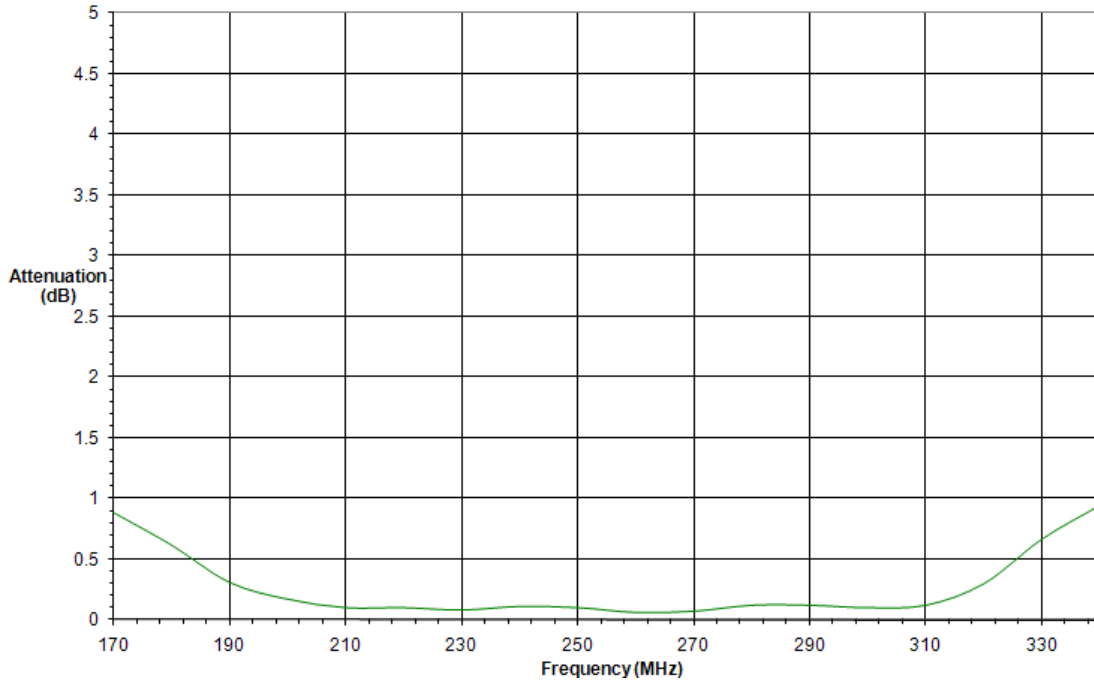

VSWR
Tuned Dipole Antenna
Model FCC-3

