



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892




www.AHSystems.com

PAM-0118P

Preamplifier
20 MHz – 18 GHz

This preamplifier has a broad frequency range and high gain, designed to match the double ridge guide horn antenna. An ideal solution for improving system sensitivity.

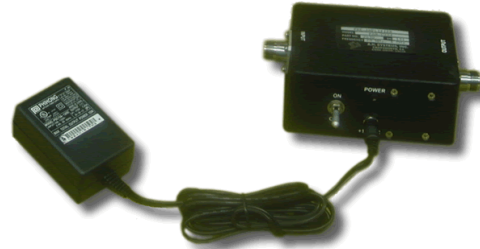

Frequency Range: 20 MHz – 18 GHz

Gain (typical): 41 dB

Flatness: +/- 2.75 dB (above 500 MHz)

Noise Figure: 3 dB

Output Power @ 1 dB
compression + 6 dBm

VSWR (typical): Less than 2.5:1

Connector: N-Type, female

Physical Dimensions

Height: 2.5 in. (63 mm)

Width: 3.75 in. (95 mm)

Length: 6.25 in. (158 mm)

Weight: 1.1 lb.'s (0.5 kg)

Features

- Broad Frequency Range of 20 MHz to 18 GHz
- Low Noise, High Gain
- Individually Calibrated
- Low VSWR

The PAM-0118 broadband preamplifier is an excellent choice for improving system dynamic range. The performance of this preamplifier will increase your system sensitivity by 40 dB and is ideal for low-amplitude test measurements. When measuring in the EMC lab or out in the field for general RFI testing, this preamplifier has a rugged compact design.

Recommended Accessories

- SAS-571 (Double Ridge Guide Horn Antenna)
- SAC-18G-3 (3 Meter Low Loss Cable)
- SAC-18G-0.5 (0.5 Meter Low Loss Cable)



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223
Fax: (818) 998-6892

◆ sales@AHSystems.com
◆ www.AHSystems.com



A.H. Systems, inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311

818.998.0223 fax 818.998.6892

sales@AHSystems.com www.AHSystems.com



Preamplifier Calibration

Model Number: PAM-0118P

