



## A.H. Systems, Inc.

9710 Cozycroft Ave.  
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892




www.AHSystems.com

## SAS-521-4

### Biological Antenna

25 MHz – 4 GHz

Simplify testing with this hybrid antenna providing an inexpensive solution to wide band applications.

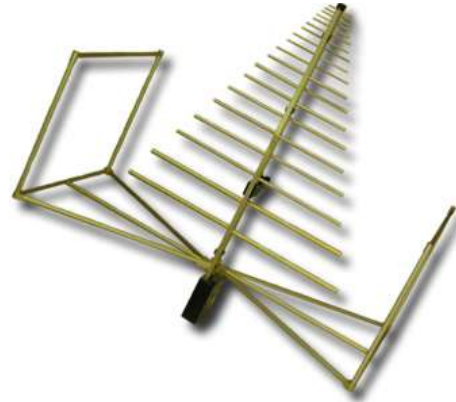

Frequency Range: 25 MHz - 4000 MHz  
Maximum Continuous Power: 1000 Watts  
Impedance: 50  $\Omega$   
Pattern Type: Directional  
Max Radiated Field: 100 V/m  
Connector: N-Type, female  
Mounting Base: 1/4 - 20 Thread, female

### Features

- Wide Frequency Range of 25 MHz to 4 GHz
- Hybrid Log Periodic - Biconical Antenna
- Excellent symmetry, compact and lightweight
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction
- Three Year Warranty

The A.H. Systems' SAS-521-4 Biological Antenna is one of our latest antennas, providing an inexpensive solution to wide band applications. Whether testing inside a shielded enclosure or outdoors, this antenna will display efficient performance characteristics through the frequency range of 25 MHz to 4000 MHz.

### Recommended Accessories

- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- BTE-510 (Biological antenna tripod mount)
- PAM-0204 (22 dB Preamplifier)



# A.H. Systems, Inc.

9710 Cozycroft Ave.  
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892



www.AHSystems.com




## A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311  
Phone (818) 998-0223 Fax (818) 998-6892  
E-mail: info@AHSystems.com  
Web site: <http://www.AHSystems.com>

Antenna Factor  
Biological Antenna  
Model: SAS-521-4

Conversion of meter reading  
to field strength:  
 $dBuV/m = dBuV + AF + \text{cable loss}$

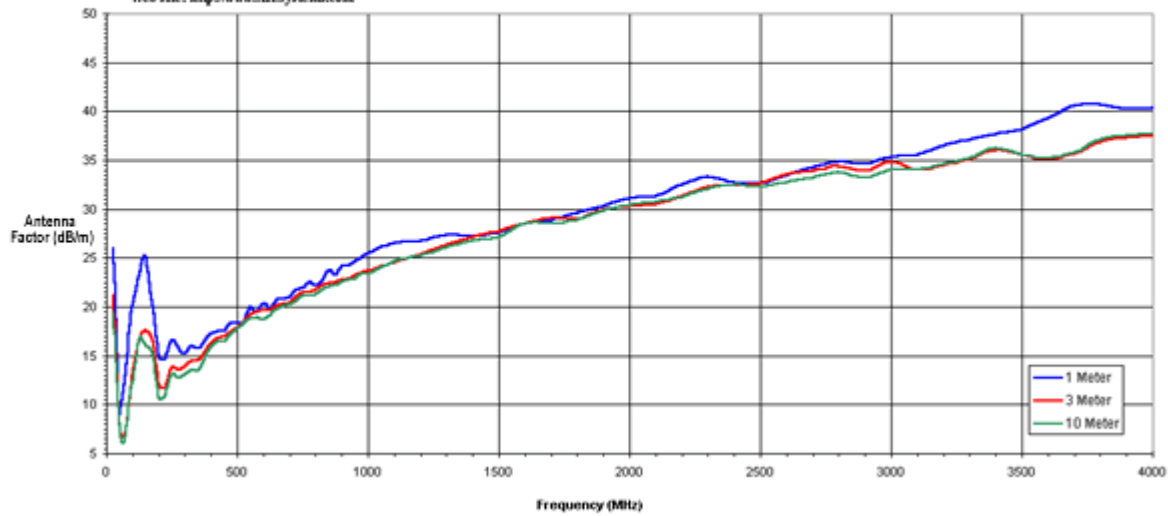

## A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311  
Phone (818) 998-0223 Fax (818) 998-6892  
E-mail: sales@AHSystems.com  
Web site: <http://www.AHSystems.com>

VSWR  
Biological Antenna  
Model: SAS-521-4

