



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223



sales@AHSystems.com

Fax: (818) 998-6892



www.AHSystems.com

SAS-540

Biconical Antenna

20 MHz – 330 MHz

This Biconical antenna will provide reliable, repeatable measurements. An ideal solution and a standard workhorse of any EMC test house for compliance testing.



Frequency Range: 20 MHz - 330 MHz

Antenna Factor: 8.5 to 21.5 dB

Gain: -22 to 2.8 dBi

Maximum Continuous Power: 1 Watt

Max Radiated Field: 2 V/m

Pattern Type: omni-directional

Impedance: 50 Ω

VSWR: 2.0:1

Connector: N-Type, female

Mounting: ABC-B (included)

Features

- Frequency Range of 20 MHz to 330 MHz
- Receive and Transmit
- Individually Calibrated (1, 3 and 10 Meter calibration included, horizontal polarization)
- Rugged Construction
- Three Year Warranty

The A.H. Systems SAS-540 Biconical antenna operates efficiently over the frequency range of 20 MHz to 330 MHz. Compact in size, this Biconical Antenna is an ideal for use in a shielded room or anechoic chamber. The antenna balun is designed using an unbalanced to balanced transformer for improved linearity response and is the standard workhorse of any EMC compliance test house.

Recommended Accessories

- ATU-510 (Antenna Tripod, Wooden)
- AEH-510 (Azimuth and Elevation Head)
- PAM-0202 (30 dB Preampifier)



A.H. Systems, Inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311



Tel: (818) 998-0223
Fax: (818) 998-6892

◆ sales@AHSystems.com
◆ www.AHSystems.com




A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311
Phone (818) 998-0223 Fax (818) 998-6892
E-mail: info@AHSystems.com
Web site: http://www.AHSystems.com

Antenna Factor Biconical Antenna Model SAS-540

Conversion of meter reading
to field strength:
 $\text{dBuV/m} = \text{dBuV} + \text{AF} + \text{cable loss}$

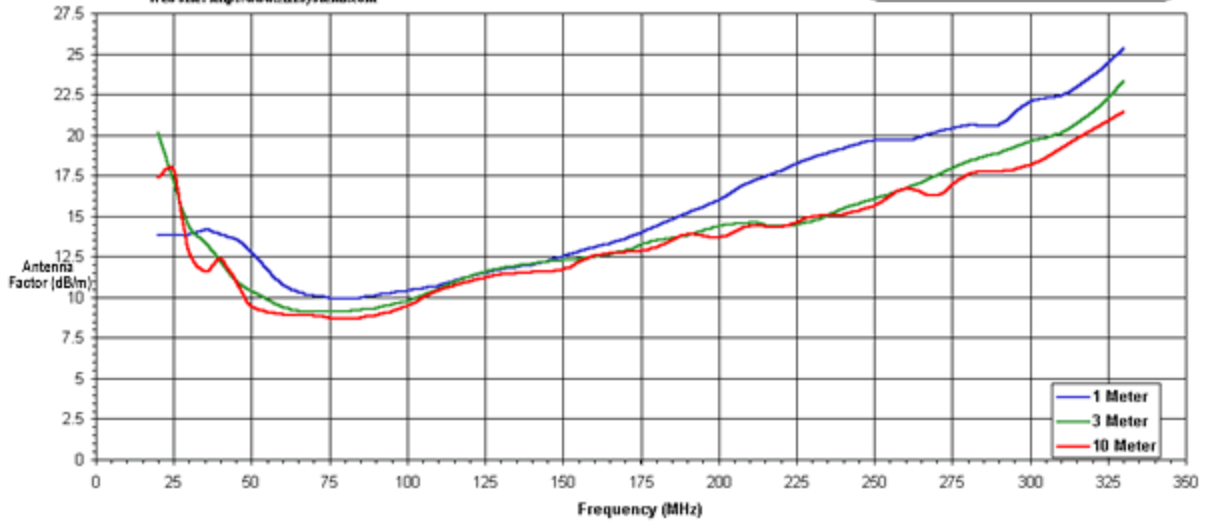

A.H. Systems, inc.

9710 Cozycroft Ave.
Chatsworth, CA 91311
818.998.0223 fax 818.998.6892
sales@AHSystems.com www.AHSystems.com

Antenna VSWR Model: SAS-540

