A.H. Systems, Inc.
9710 Cozycroft Ave.
Chatsworth, CA 91311

Tel: (818) 998-0223 ◆ sales@AHSystems.com
Fax: (818) 998-6892 ◆ www.AHSystems.com

SAS-581-10

Standard Gain Horn Antenna

1.70 GHz – 2.60 GHz

This Standard gain horn antenna has medium gain, low VSWR, and a constant antenna factor; excellent for both immunity and emissions testing.

Frequency Range:	1.70 GHz – 2.60 GHz
Antenna Factor:	25 - 28 dB/m
Average Gain:	10 dBi
Maximum Continuous Power:	500 Watts
Beamwidth E-plane:	65°
Beamwidth H-plane:	45°
Impedance:	50 Ω
VSWR:	1.3:1 (1.6:1 max)
Connector:	WR-430 to N-Type female adapter

Features

- Frequency Range of 1.70 GHz to 2.60 GHz
- Linearly Polarized High Gain, Low VSWR
- Individually Calibrated at 1 and 3 Meter Horizontal Polarity
- Attached Tripod Mounts for Horizontal and Vertical Mounting
- Three year Warranty

The Standard Gain Horn Antennas are designed specifically for utilization in emissions and immunity testing over the frequency range of 1 to 40 GHz. Each antenna is linearly polarized and has medium gain, low VSWR, and a constant antenna factor. The Standard Gain Horn performance is very precise and predictable through design parameters. Comparisons of measured versus computed antenna factors and gain have been shown to be +/- .5 dB. Therefore, the antenna is considered to be a standard reference, similar to that of a resonant dipole below 1 GHz. The coax-to-waveguide adapter is the only power-limiting component on the antenna and can be removed if high fields are desired. Each Standard Gain Horn comes with a tripod mount that adapts to any tripod with ¼-20 male threads. Horizontal and vertical polarization is obtained by rotating the antenna on the tripod.

A.H. Systems, Inc.
9710 Cozycroft Ave.
Chatsworth, CA 91311
Tel: (818) 998-0223 ◆ sales@AHSystems.com
Fax: (818) 998-6892 ◆ www.AHSystems.com

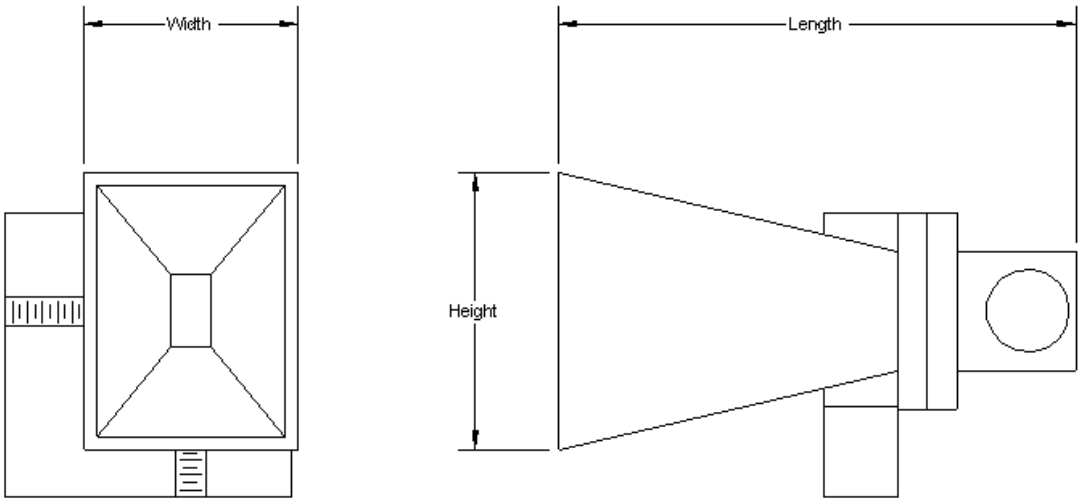

Figure 1 – SAS-581-10 (Horizontal Polarization)

Physical Dimensions:

Length: 14.5 in. *(36.8 cm)*
Width: 4 in. *(10.2 cm)*
Height: 8 in. *(20.3 cm)*
Weight: 4.1 lb.'s *(1.86 kg)*