A.H. Systems, Inc.
9710 Cozycroft Ave.
Chatsworth, CA 91311

Tel: (818) 998-0223 ◆ sales@AHSystems.com
Fax: (818) 998-6892 ◆ www.AHSystems.com

SAS-585-20

Standard Gain Horn Antenna

8.2 GHz – 12.4 GHz

This Standard gain horn antenna has medium gain, low VSWR, and a constant antenna factor; excellent for both immunity and emissions testing.

* pictured mounted on an AEH-510 Tripod head

Frequency Range:	8.2 GHz – 12.4 GHz
Antenna Factor:	29 - 32 dB/m
Average Gain:	20.1 dBi
Maximum Continuous Power:	250 Watts
Beamwidth E-plane:	15.9°
Beamwidth H-plane:	16.3°
Impedance:	50 Ω
Average VSWR:	1.15:1 (1.3:1 max)
Connector:	WR-90 to N-Type female adapter

Features

- Frequency Range of 8.2 GHz to 12.4 GHz
- Linearly Polarized High Gain, Low VSWR
- Individually Calibrated at 1 Meter Horizontal Polarity
- Attached Tripod Mount for Horizontal and Vertical Mounting
- Three year Warranty

The Standard Gain Horn Antennas are designed specifically for utilization in emissions and immunity testing over the frequency range of 1 to 40 GHz. Each antenna is linearly polarized and has medium gain, low VSWR, and a constant antenna factor. The Standard Gain Horn performance is very precise and predictable through design parameters. Comparisons of measured versus computed antenna factors and gain have been shown to be +/- .5 dB. Therefore, the antenna is considered to be a standard reference, similar to that of a resonant dipole below 1 GHz. The coax-to-waveguide adapter is the only power-limiting component on the antenna and can be removed if high fields are desired. Each Standard Gain Horn comes with a tripod mount that adapts to any tripod with ¼-20 male threads. Horizontal and vertical polarization is obtained by rotating the antenna on the tripod.

Recommended Accessories

- ATU-514 (Antenna Tripod)
- AEH-510 (Azimuth and Elevation Head)
- SAC-18G-3 (3 Meter Low Loss Cable)

A.H. Systems, Inc.
9710 Cozycroft Ave.
Chatsworth, CA 91311

Tel: (818) 998-0223 ◆ sales@AHSystems.com
Fax: (818) 998-6892 ◆ www.AHSystems.com

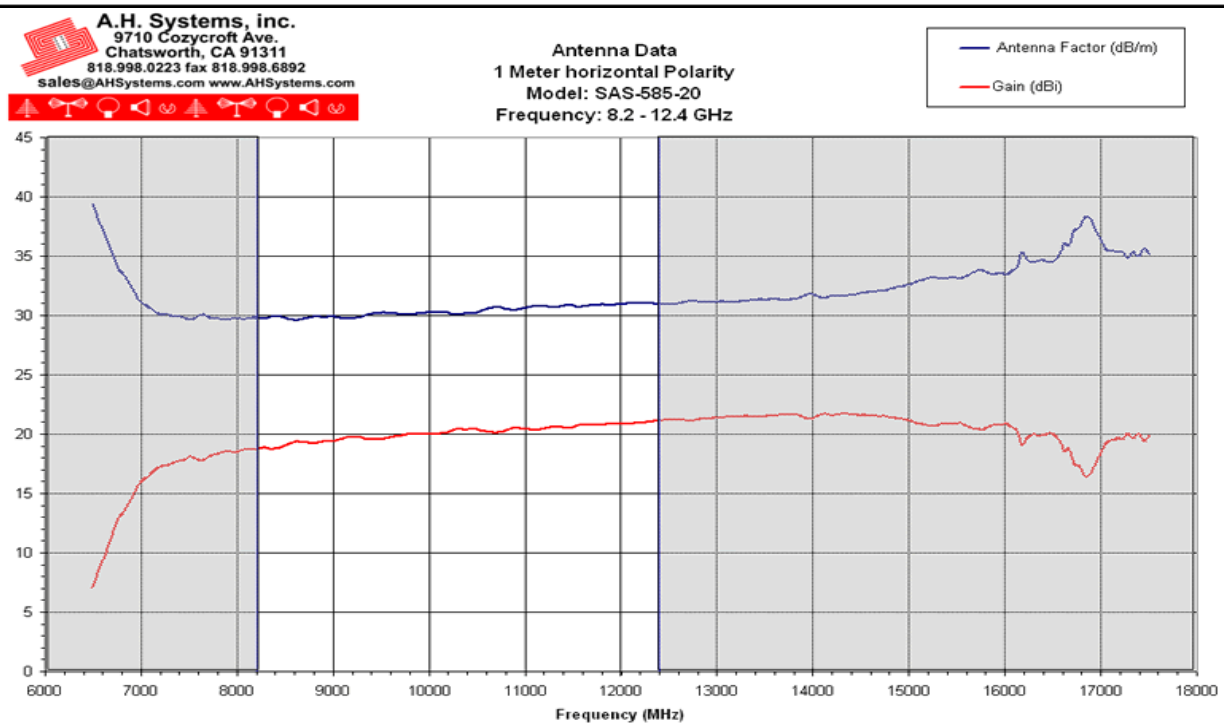

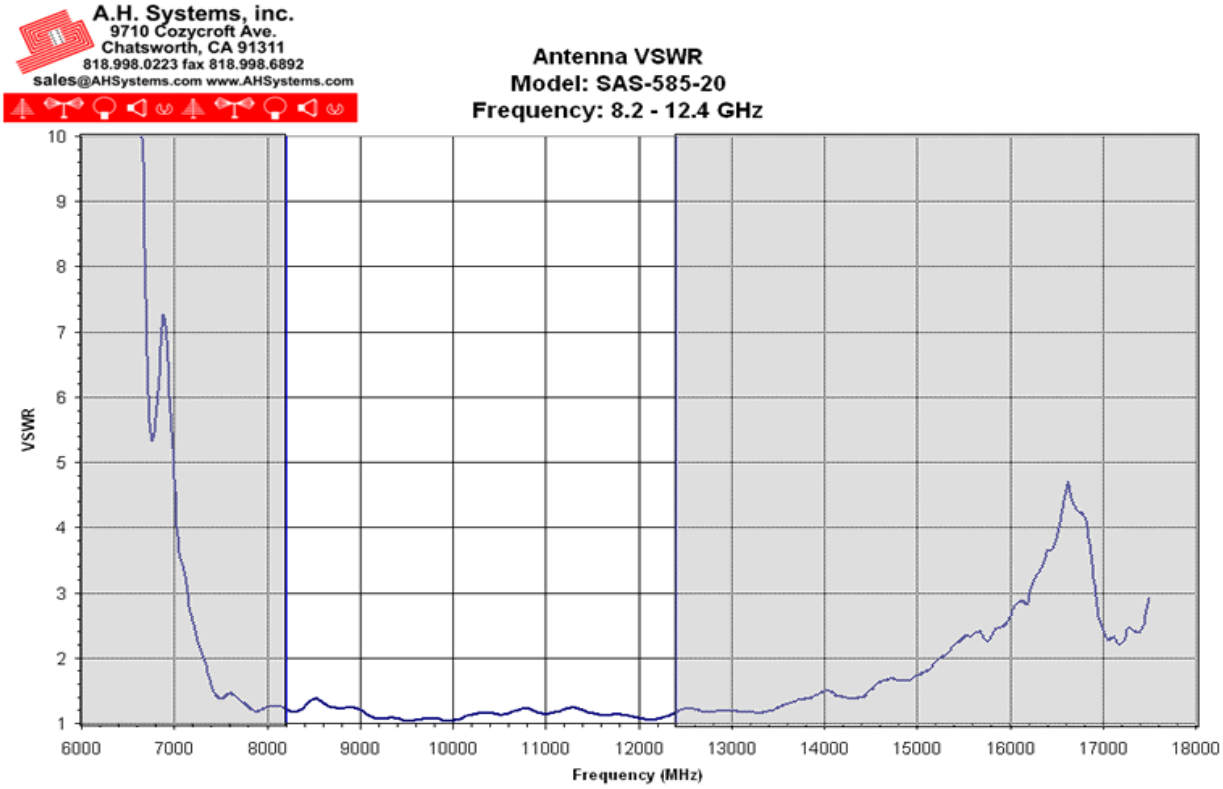

A.H. Systems, Inc.
9710 Cozycroft Ave.
Chatsworth, CA 91311
Tel: (818) 998-0223 ◆ sales@AHSystems.com
Fax: (818) 998-6892 ◆ www.AHSystems.com

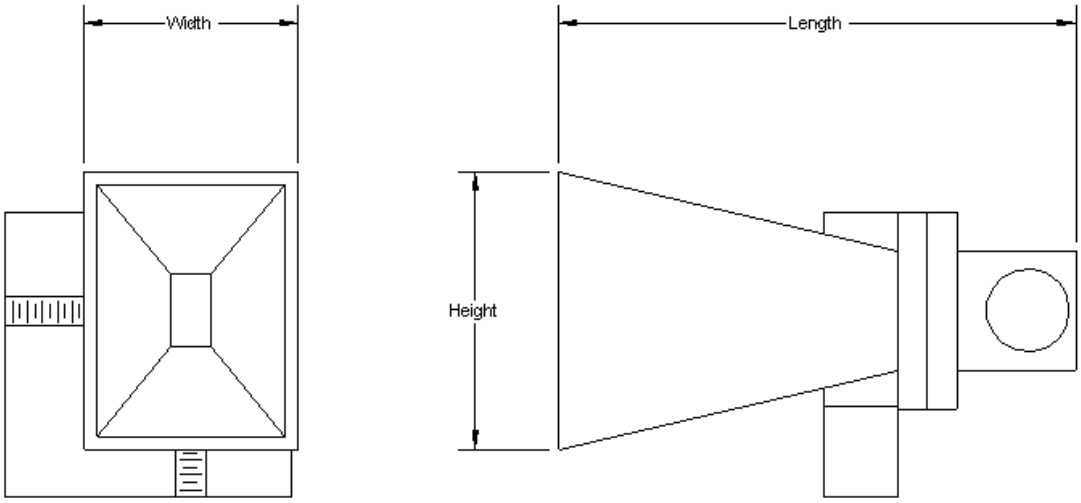

Figure 1 – SAS-585-20 (Horizontal Polarization)

Physical Dimensions:

Length: 11.2 in. *(28.5 cm)*
Width: 3.6 in. *(9.1 cm)*
Height: 4.9 in. *(12.5 cm)*
Weight: 1 lb.'s *(453 g)*